
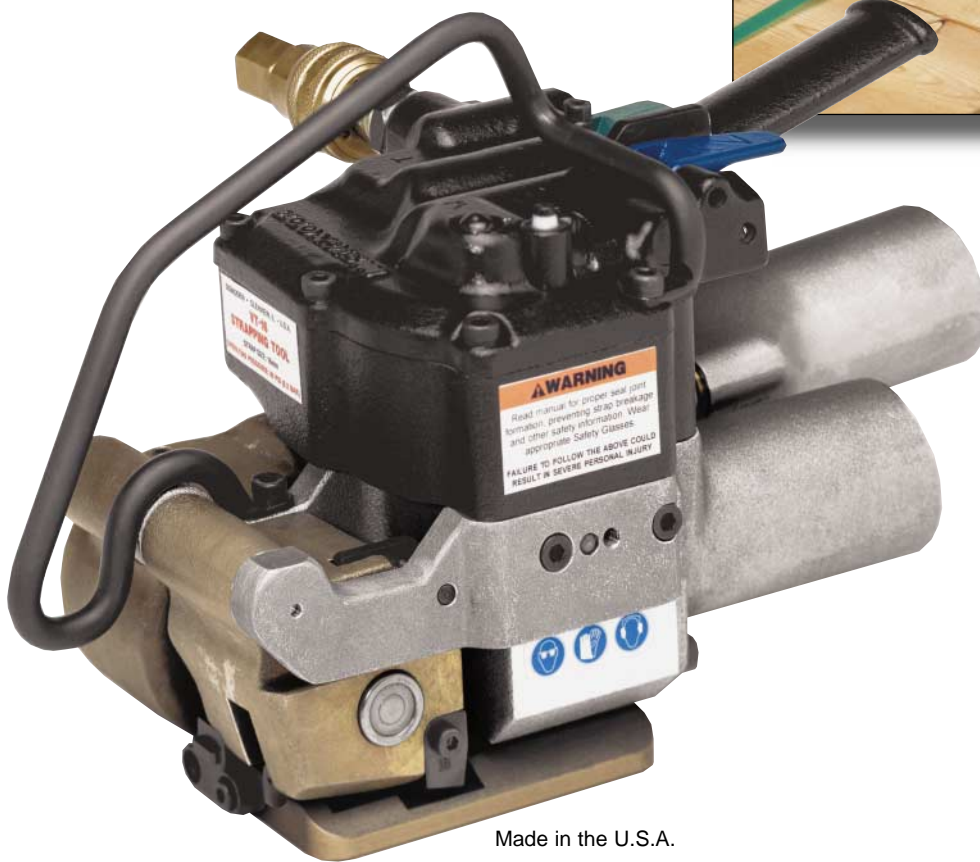


VT-16/19

Pneumatic Tension-Weld® Combination Tool for Polyester Strapping

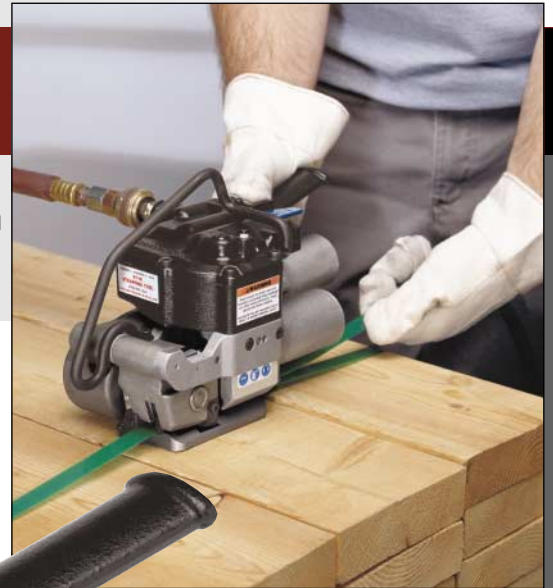

Made in the U.S.A.

Easy to operate

- Two-strap loading
- Two-button operation
- The only tool with built-in weld cool time
- Easy to remove from strap after cycling
- The lightest tool in its class—9.5 lbs.(4.3 kg)

Superior performance

- Fast cycle time
- Applies up to 600 lbs. (2700 N) of tension
- High-strength friction weld

Simple

- No adjustments necessary
- Few wear parts to replace
- Wear parts can be replaced in minutes

Durable

All metal and alloy parts provide long-lasting, low-maintenance operation.

Specifications

Strapping: For use on 5/8" and 3/4" (16 mm and 19 mm) High-Strength Tenax® polyester strapping.

 **SIGNODE®**

180 Hastings Drive
Buffalo Grove, Illinois 60089